

● 应用 Applications

广泛应用于废品回收,粮食,木业,化工,建材,山,火电,钢铁,轻工业等领域的除铁和分离提纯。

Widely used in waste recycling, grain, wood industry, chemical industry, building materials, mountain, thermal power, steel, light industry and other fields of iron removal and separation and purification.

● 特点 Characteristics

1. 结构紧凑, 低噪声, 易维护, 能自动弃铁, 节省成本, 工作的磁场来源于稀土永磁或者铁氧体而不是电磁铁, 达到节能的效果。

2. 使用特制密封轴承, 以及自动纠偏的皮带设计, 适应恶劣环境下的长时间工作。独特的铠装式皮带设计, 能有效防止尖锐的铁磁性杂质对皮带的损害, 提高使用寿命, 节省相应的成本。



3. 据客户使用要求, 可以提供防爆型除铁器。

4. 使用稀土永磁的SWPMR 系列磁选机具有磁场梯度高, 磁场稳定, 吸力强的特点, 可以连续有效地清除重量0.1KG-35KG的铁杂质, 甚至清除深埋在物料里的铁磁性物质。

5. 特殊要求, 可以订做。



1. Compact structure, low noise, easy maintenance, can automatically abandon iron, save costs, working magnetic field from rare earth permanent magnet or ferrite instead of electromagnet, to achieve energy saving effect.
2. The use of special sealed bearings, as well as automatic correction belt design, to adapt to the harsh environment for a long time work. The unique armored belt design can effectively prevent the damage of sharp ferromagnetic impurities to the belt, improve the service life and save the corresponding cost.
3. According to customer requirements, explosion-proof iron remover can be provided.
4. The swpmr series magnetic separator using rare earth permanent magnet has the characteristics of high magnetic field gradient, stable magnetic field and strong suction, which can continuously and effectively remove iron impurities weighing 0.1KG-35KG, and even remove ferromagnetic substances buried deep in the material.
5. Special requirements, can be customized.

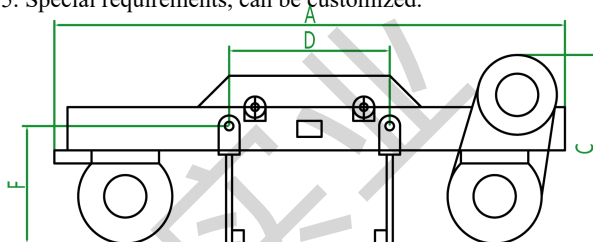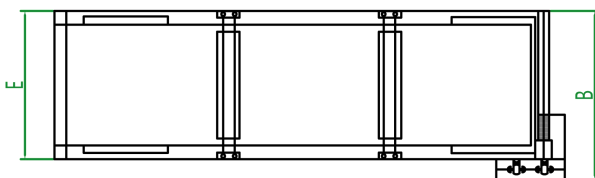

● 订货代码示例 Order code example

企业代码	规格mm	系列	悬挂高度mm	额定磁场	适用带宽mm
LC	H15	P	15	C	5
LC	详见技术参数编码	P: 皮带式	15: 150	C: ≥50	5: 500

● 技术参数 Technical specification

编号	规格(mm)						悬挂高度	额定磁场	适用带宽
	A	B	C	D	E	F			
H15	1970	903	722	620	647	451	15: 150	C: ≥50	5: 500
H20	2110	1053	722	770	797	451	20: 200	C: ≥50	6: 650
H25	2320	1253	722	970	987	451	25: 250	C: ≥50	8: 800
H30	2690	1453	803	1120	1190	451	30: 300	C: ≥50	10: 1000
H35	2890	1713	868	1320	1430	516	35: 350	C: ≥50	12: 1200
H40	3090	1913	868	1520	1630	516	40: 400	C: ≥50	14: 1400
H45	3310	2143	955	1760	1852	590	45: 450	C: ≥50	16: 1600
H50	3540	2420	1050	2045	2130	590	50: 500	C: ≥50	18: 1800
H55	4510	2670	1050	2350	2400	780	55: 550	C: ≥50	G20: 2000

● 订货代码示例 Order code example

企业代码	规格mm	系列	悬挂高度mm	额定磁场	适用带宽mm
LC	H20	P	20	C9	6
LC	详见技术 参数编码	P: 皮带式	20: 200	C9: 90	6: 650

● 技术参数 Technical specification

编号	规格(mm)					悬挂高度	额定磁场	适用带宽
	A	B	C	D	E			
H20	2110	1053	722	770	873	20: 200	C9: 90	6: 650
H20	2110	1053	722	770	873	20: 200	C12: 120	6: 650
H20	2260	1053	722	870	873	20: 200	C15: 150	6: 650
H25	2470	1253	722	970	1073	25: 250	C9: 90	8: 800
H25	2470	1253	722	970	1073	25: 250	C12: 120	8: 800
H25	2570	1253	722	1070	1073	25: 250	C15: 150	8: 800
H30	2840	1450	803	1120	1273	30: 300	C9: 90	10: 1000
H30	2840	1450	803	1120	1273	30: 300	C12: 120	10: 1000
H30	2940	1450	803	1220	1273	30: 300	C15: 150	10: 1000
H35	3040	1713	868	1320	1523	35: 350	C9: 90	12: 1200
H35	3040	1713	868	1320	1523	35: 350	C12: 120	12: 1200
H35	3040	1713	868	1320	1523	35: 350	C15: 150	12: 1200
H40	3410	1913	924	1520	1723	40: 400	C9: 90	14: 1400
H40	3410	1913	924	1520	1723	40: 400	C12: 120	14: 1400
H40	3410	1913	924	1536	1723	40: 400	C15: 150	14: 1400
H45	3610	2190	960	1720	1923	45: 450	C9: 90	16: 1600
H45	3610	2190	960	1720	1923	45: 450	C12: 120	16: 1600
H45	3810	2190	980	1820	1923	45: 450	C15: 150	16: 1600
H50	4045	2570	960	1970	2173	50: 500	C9: 90	18: 1800
H50	4045	2570	960	1970	2173	50: 500	C12: 120	18: 1800
H50	4245	2570	1050	2070	2173	50: 500	C15: 150	18: 1800
H55	4575	2670	960	2270	2430	55: 550	C9: 90	G20: 2000
H55	4810	2670	1020	2350	2430	55: 550	C12: 120	G20: 2000
H55	4810	2670	1070	2350	2430	55: 550	C15: 150	G20: 2000
H60	4810	2820	1020	2550	2670	60: 600	C9: 90	22: 2200
H60	4810	2820	1070	2550	2670	60: 600	C12: 120	22: 2200
H60	4810	2820	1170	2550	2670	60: 600	C15: 150	22: 2200



Shanghai Lcit Industrial Co.,Ltd.
www.lcitind.com www.lcitind.cn
+86-21-57646228
880 Ziyue Road, Minhang District, Shanghai